
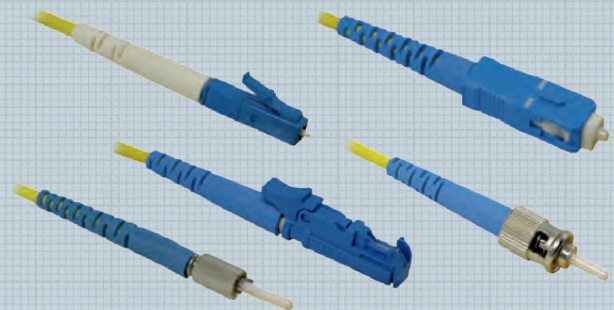


Simplex Patch and Adapter Cables

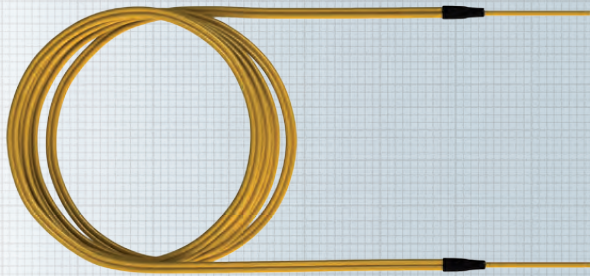

The FO patch cable has been developed especially for use in offices, industry and data centers. High-quality processing ensures that the optical transmission parameters offer a maximum of data security.

The FO patch cable can be ordered together with all standard FO connectors.

Specification:

Norms	IEC 61 754-4, TIA 604-3
Technology	ceramic ferrule
Tuning	in 45° and 60° increments depending on connector build
Strain relief	100 N
Operating temperature	-10 °C to +70 °C
Material	flame-retardant acc. to UL 94 V-0
Service life	minimum 1000 mating cycles
Housing colors	per connector norm
Sheath	FRNC: IEC 60 332-1; IEC 50 754-2; IEC 61 034
Cable color	aqua RAL 6027 (Multimode OM3) yellow RAL 1021 (Singlemode OS2)
Build	I-VH
Packaging unit	individually packaged