


FO splice housing extendable OVA 19" 2U/3U

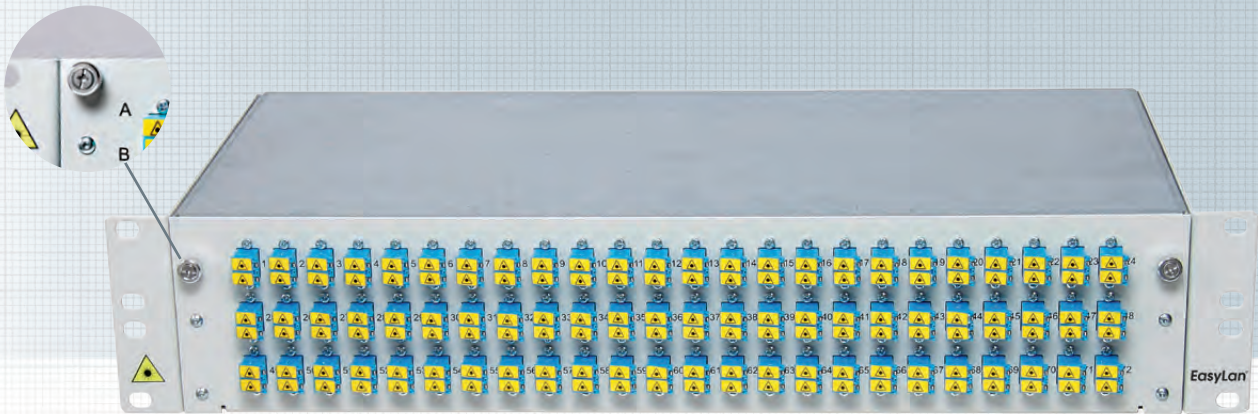

FO splice housing extendable with quick lock and exchangeable front panel for up to 144 fibers. For SC / LC and E2000® couplings the front panel is also supplied with screw holes in order to affix couplings. The extendible depth of 200mm ensures comfortable access to the couplings. The splice cassette holder can be loaded with up to a maximum of 4 cassettes and secured with stud bolts. The splice protectors (crimp or fusion splice protector) and their holders are not included in delivery and must be ordered separately. Our splice boxes are available in two different versions: In variant 1, the pigtails are inserted and loaded. In variant 2, the pigtails are ready for splicing, inserted and loaded.

The pigtails are dyed per VDE color coding in the primary and secondary coating. The box can also be offset by 40 mm towards the rear. The cable entry is effected via cable glands (special accessory).

- Full metal design
- 40 mm offsetable towards rear
- Powder coated, color RAL 7035
- Cover metallic luster
- Dimensions (HxWxD): 88.90 x 483 x 230 mm (2U), 133.35 x 483 x 230 mm (3U)
- When open, the box can be tilted downwards.

Splice holder (crimp splice protector)	LVZ0003
Crimp splice protector	LVZ0005
Splice holder (fusion splice protector)	LVZ0004
Fusion Splice Protector	LVZ0006
Fusion splice protector and holder not included in delivery (please order separately). Additional loaded variants and connector systems on request	