


## Data Outlet 2.8U, Open design, Cat. 6, Class E, Unshielded

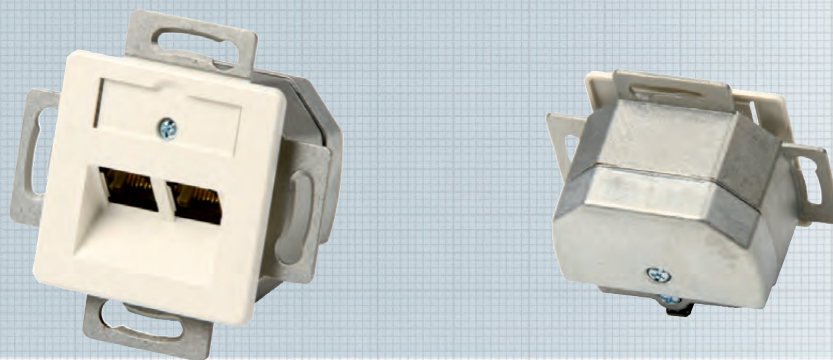

Data outlet for transmission of analog and digital voice, image and data signals. Performance range complies with all requirements for Cat. 6, class E. Cable lead-in also possible with standard flush-mounted cup, subject to compliance with specified bending radii. Quick and easy installation. Inside lid of data outlet features color-coded wiring scheme. Open design— can be combined with UAE faceplates from all major switch manufacturers.

The wiring of the data outlet can be done extremely quickly. Contact area is separated from the wiring area, resulting in almost no shorts caused by loose wire ends.

### Standards:

ISO/IEC 11 801:2002, EN 50 173:2007, ISO/IEC 60 603-7-5, TIA/EIA 568-B.2-10:2008, EN 55022

### Properties:

Housing	solid metal, die-cast zinc / plastic central flap (ASA)
RJ45 socket	EN 60603-7, unshielded
Wiring	1-2, 3-6, 4-5, 7-8
Electrical Specifications	Cat. 6, Class E
Connection	Cable: LSA connection socket: RJ45 unshielded
Application	Installation in cable ducts, flush or surface-mounted, installed in floor box
Packaging unit	5 pcs. per box

Description	Ordering code
Data Outlet 2.8U, Open design, Cat. 6, Class E, Unshielded, similar to RAL 9010	CADEUU92
UP cover frame, single, 80 x 80 mm, similar to RAL 9010	ADZ00002
UP cover frame, double, 150 x 80 mm, similar to RAL 9010	ADZ00003