


# FODH/2

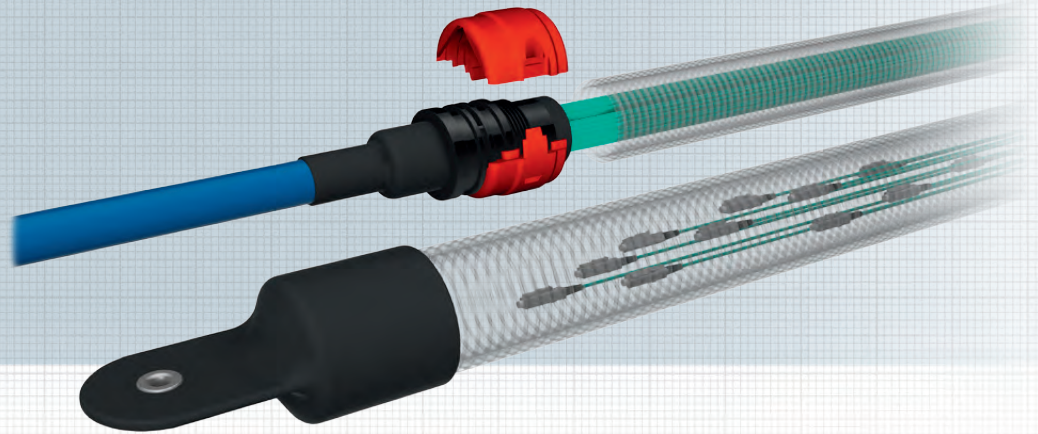

The FO distribution system for the widest variety of installations. The system is robust and known for its ease of installation: Simply feed in the cable, open the red clip, remove the hose and connect the plug. Done!

- robust design handles the widest variety of installation environments
- IP20
- features aluminum distributor head
- up to 144 fibers
- protective hose disconnects via red attachment clip, which can be removed in seconds
- fan-outs are impervious to dust and are housed in non-bendable corrugated hose which also assists in feeding in cable and acts as a buffer against jerky tensile loads

#### Dimensions and installation data for FO connectors:

Fibers	2 – 24	36 – 72	96 – 144
Length of splitter	64 mm	64 mm	64 mm
Ø Red clip	36 mm	42 mm	50 mm
Ø Protective hose	28.5 mm	35 mm	42 mm
Connector lengths*			
shortest fan-out	550 mm	550 mm	550 mm
longest fan-out (for max. number of fibers)	800 mm	1400 mm	1700 mm

\* for standard length gradation of 50 mm, ensuring the most compact design possible. Special assemblies per customer specifications are available.

Dimensions are approximate figures.

