


# FODH / E

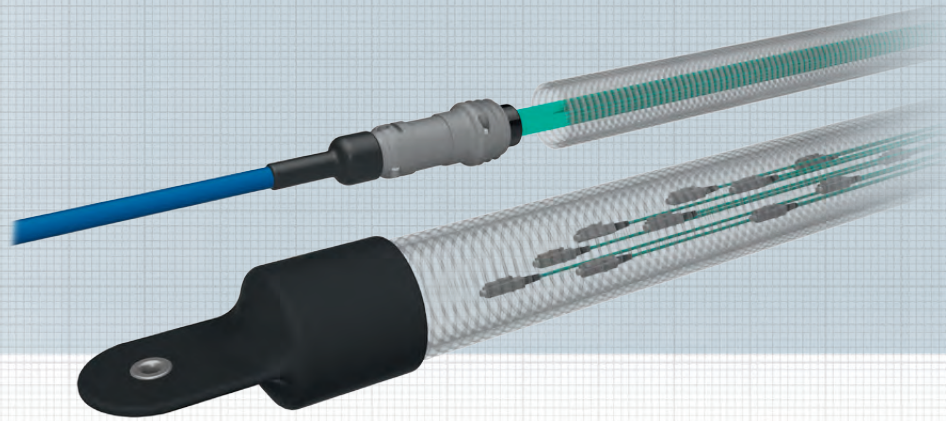

The FO distribution system for smaller installations and narrow feeds. This Eco variant is based on a plastic distribution head and is the slimmest and lightest in the EasyLan® product range.

- for small installation environments
- IP20
- plastic distribution head
- up to 24 fibers
- maximum diameter of 28.5 mm
- fan-outs fed in buckle-free corrugated hose

#### Dimensions and installation data for FO connectors:

Fibers	2 – 24
Length of splitter	69 mm
Ø Splitter	26.1 mm
Ø Protective hose	28.5 mm
Connector lengths*	
shortest fan-out	550 mm
longest fan-out (for max. number of fibers)	1100 mm

\* for standard length gradation of 50 mm, ensuring the most compact design possible. Special assemblies per customer specifications are available. Dimensions are approximate figures.

