



SC Duplex Patch and Adapter Cables



SC-D

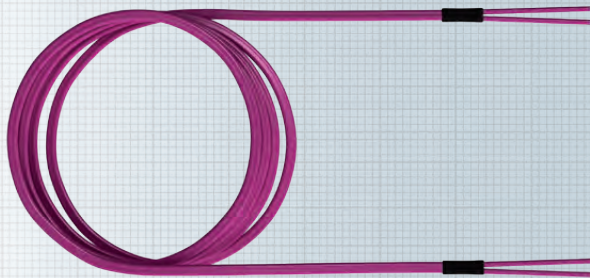

LC-D



LSH



ST-D

... (DIN, MU, etc.)

FO patch cables as connection or adapter cables.

The standard version of the connection cable is crossover. For the SC / LC duplex, subsequent mutual rotation of the connectors is possible.

The FO patch cable has been developed especially for use in offices, industry and data centers.

High-quality processing ensures that the optical transmission parameters offer a maximum of data security.

The FO patch cable can be ordered together with all standard FO connectors.

- PushPull Connectors
- One-piece design
- High mechanical and thermal resilience per Telcordia GR-326-CORE
- IEC 60874-14 series

Specification:

| | |
|-----------------------|--|
| Norms | IEC 61 754-4, TIA 604-3 |
| Technology | Ceramic ferrule (2.5 mm) |
| Tuning | in 60° increments |
| Strain relief | 100 N |
| Operating temperature | -10° C ... +70° C |
| Material | flame-retardant acc. to UL 94 V-0 |
| Service life | minimum 1000 mating cycles |
| Housing colors | per connector norms |
| Sheath | FRNC: IEC 60 332-1; IEC 50 754-2; IEC 61 034 |
| Cable color | heather violet RAL 4003 (Multimode OM4) aqua RAL 6027 (Multimode OM3) yellow RAL 1021 (Singlemode OS2) |
| Build | I-V(ZN)HH |

Packaging unit individually packaged